



1




2




VESA 100*100



3



4



CLEAN MOUNTING AREA
WITH ALCOHOL WIPES PROVIDED

5




PRESS DOWN







ACHIEVES FULL STRENGTH
AFTER 24 HOURS

6

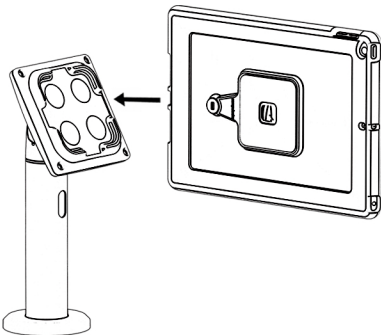


FITS VESA 100*100 MOUNT STANDS




IN THE BOX



Alcohol Wipes




Tablet Bracket



Stand Bracket


1

TIGHTEN VESA MOUNTING
PLATE AT 90°

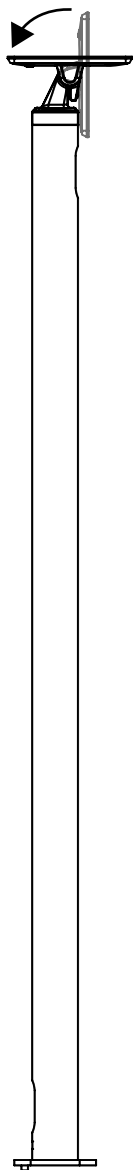


2

TURN STAND ONTO VESA
MOUNTING PLATE AND PLACE ON FLAT SURFACE.
PLACE BOTTOM PLATE
AND ALIGN WITH HOLE USING LOCATOR PIN

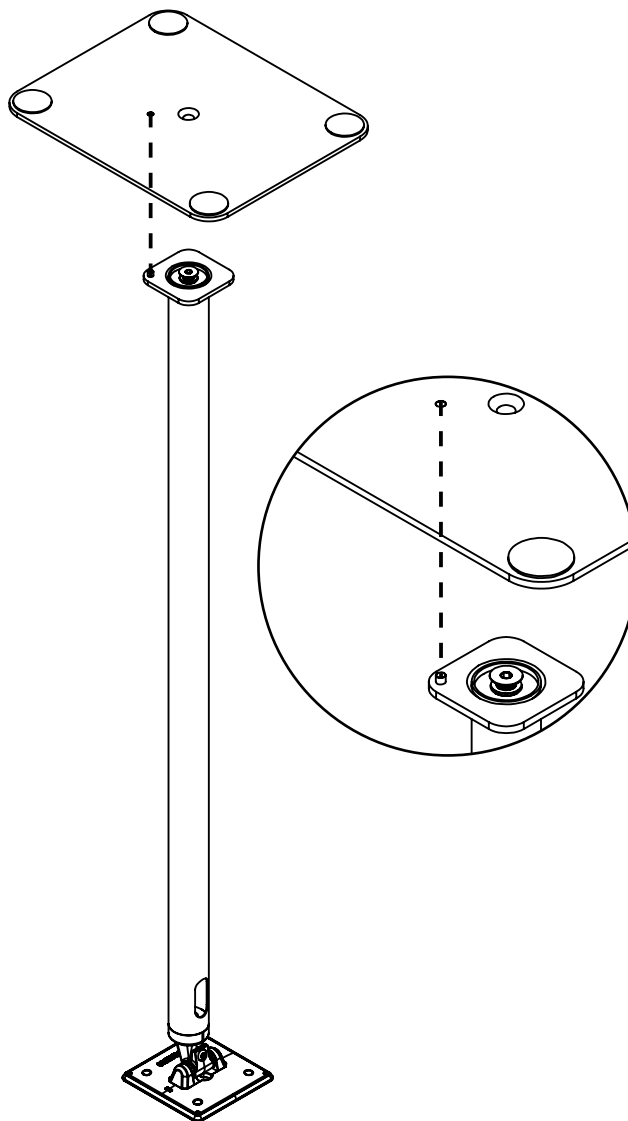


3


INSTALL THE BOTTOM PLATE USING M10 X 25mm
CONICAL ALLEN SCREW (PROVIDED)
AND 6mm ALLEN WRENCH (PROVIDED)

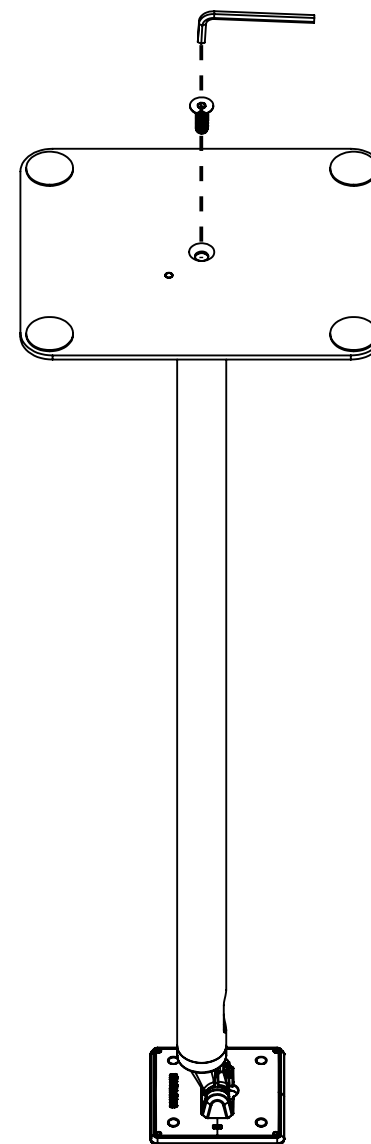


4 Free Standing or Floor Mounting

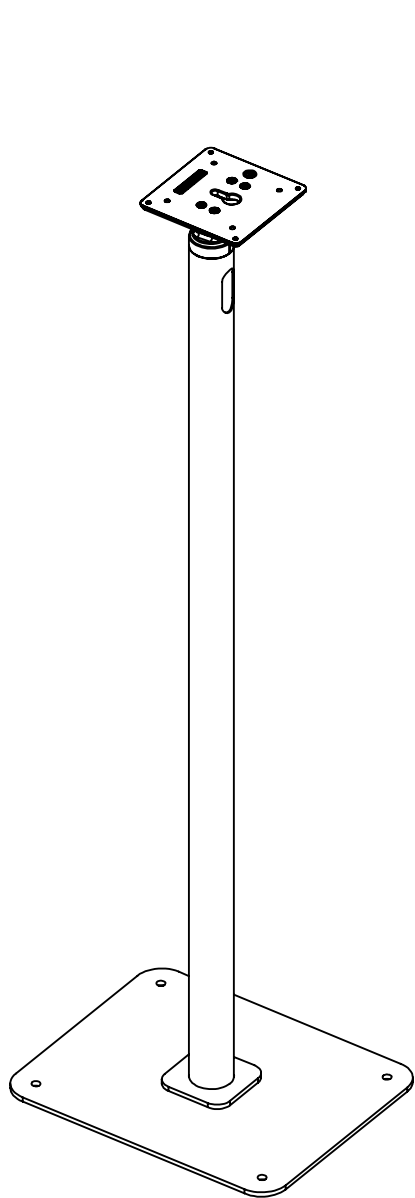

REMOVE RUBBER PLUGS

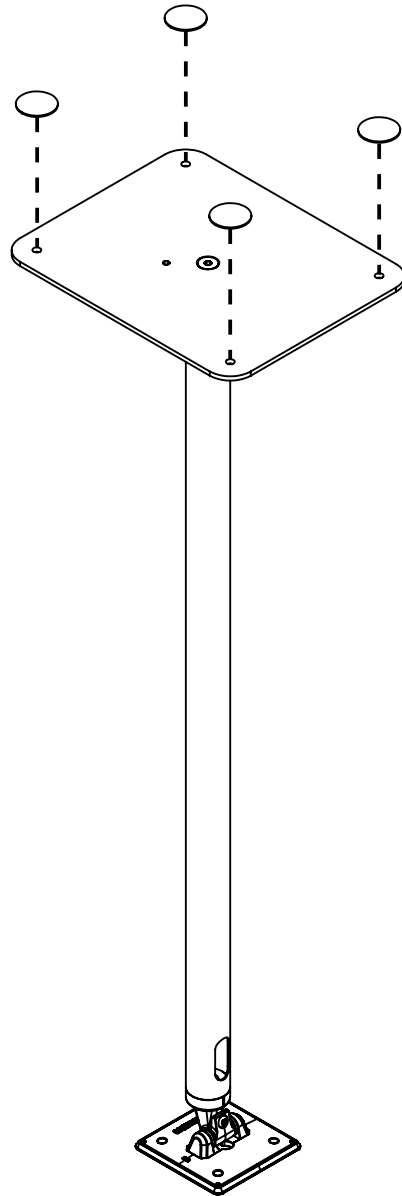


SCREW BOTTOM PLATE TO THE FLOOR
(SCREWS NOT PROVIDED)

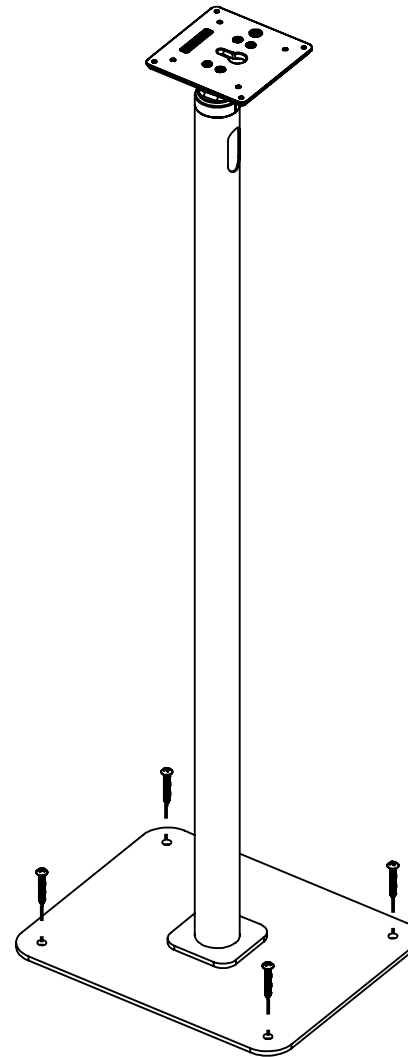

5

ROUTE CHARGING CABLE
THROUGH THE STAND AS SHOWN

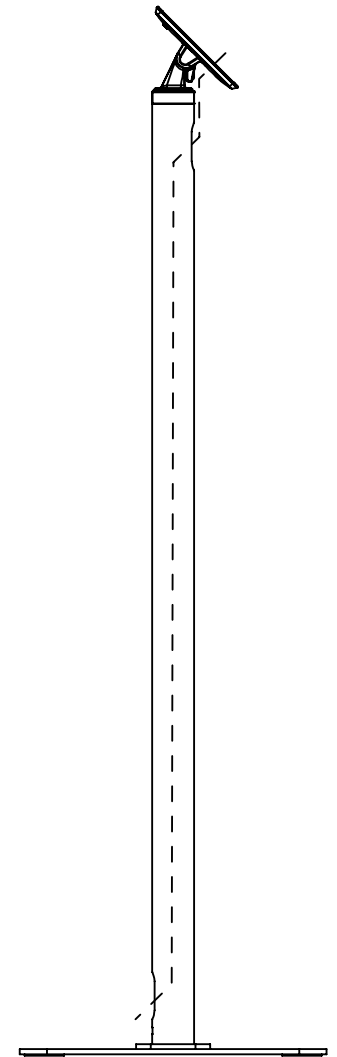

- 6


INSTALL ENCLOSURE/VESA MOUNT
TO STAND USING M4 X 8mm
PHILLIPS PAN HEAD SCREWS (PROVIDED)
- 7


INSTALL THE ENCLOSURE TOP
PLATE/VESA MOUNT PER
THEIR INSTRUCTIONS

Tilt Tension
Adjustments

In The Box

ADJUST HINGE
TENSION USING
T30 TORX
L-WRENCH
(PROVIDED)


- 

M4 X 8mm
Phillips Pan Head
Screws
- 


T30 TORX L-Wrench

- 


M10 X 25mm
Conical Allen
Screw

- 

6mm Allen Wrench

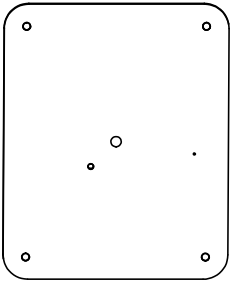- 

Bottom Plate

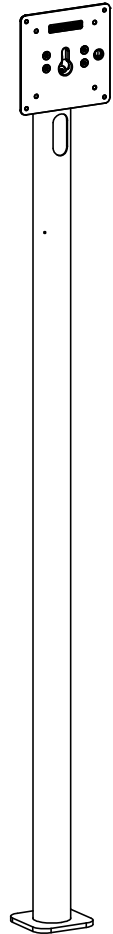- 

Swift Pole